SONOR

STRETCHED FABRIC · DESIGN & DIMENSION PACK

Cinema (Sitting Room)

Option 2 — Complete-room fabric scheme

PROJECT
1410 · Leena Bhavsar

REVISION
R3 · 22 Oct 2026

SHEET
A3 landscape · 13 sheets

STATUS
Design development · survey confirmation required

CEDIA MEMBER

THE SELECTED SCHEME · DESIGN DEVELOPMENT

Fabric throughout. Light where it matters.

Option 2 carries Lines #10 onto the side walls without adding side-wall LEDs. Existing architectural features remain the basis.



01 · OPTION 1 – FEATURE WALL: LINES FR #10, BLACK FRAME, PERIMETER + INSET



02 · OPTION 1 – REAR: FABRIC PILLARS EITHER SIDE OF THE WINDOW, COVE LED

FABRIC

Lines FR #10 / physical sample governs

BORDERS

Matt black / all four sides

LIGHT


Warm 2700 K / separate dimming groups

Visualisations show design intent; fabric texture, apparent dimensions and light levels are illustrative.

GA-01 · DESIGN DEVELOPMENT

Room plan and fabric extents

Overall envelope from the brief. Fabric-covered faces are hatched; opening positions carry their own provenance tag. Survey every opening before procurement.

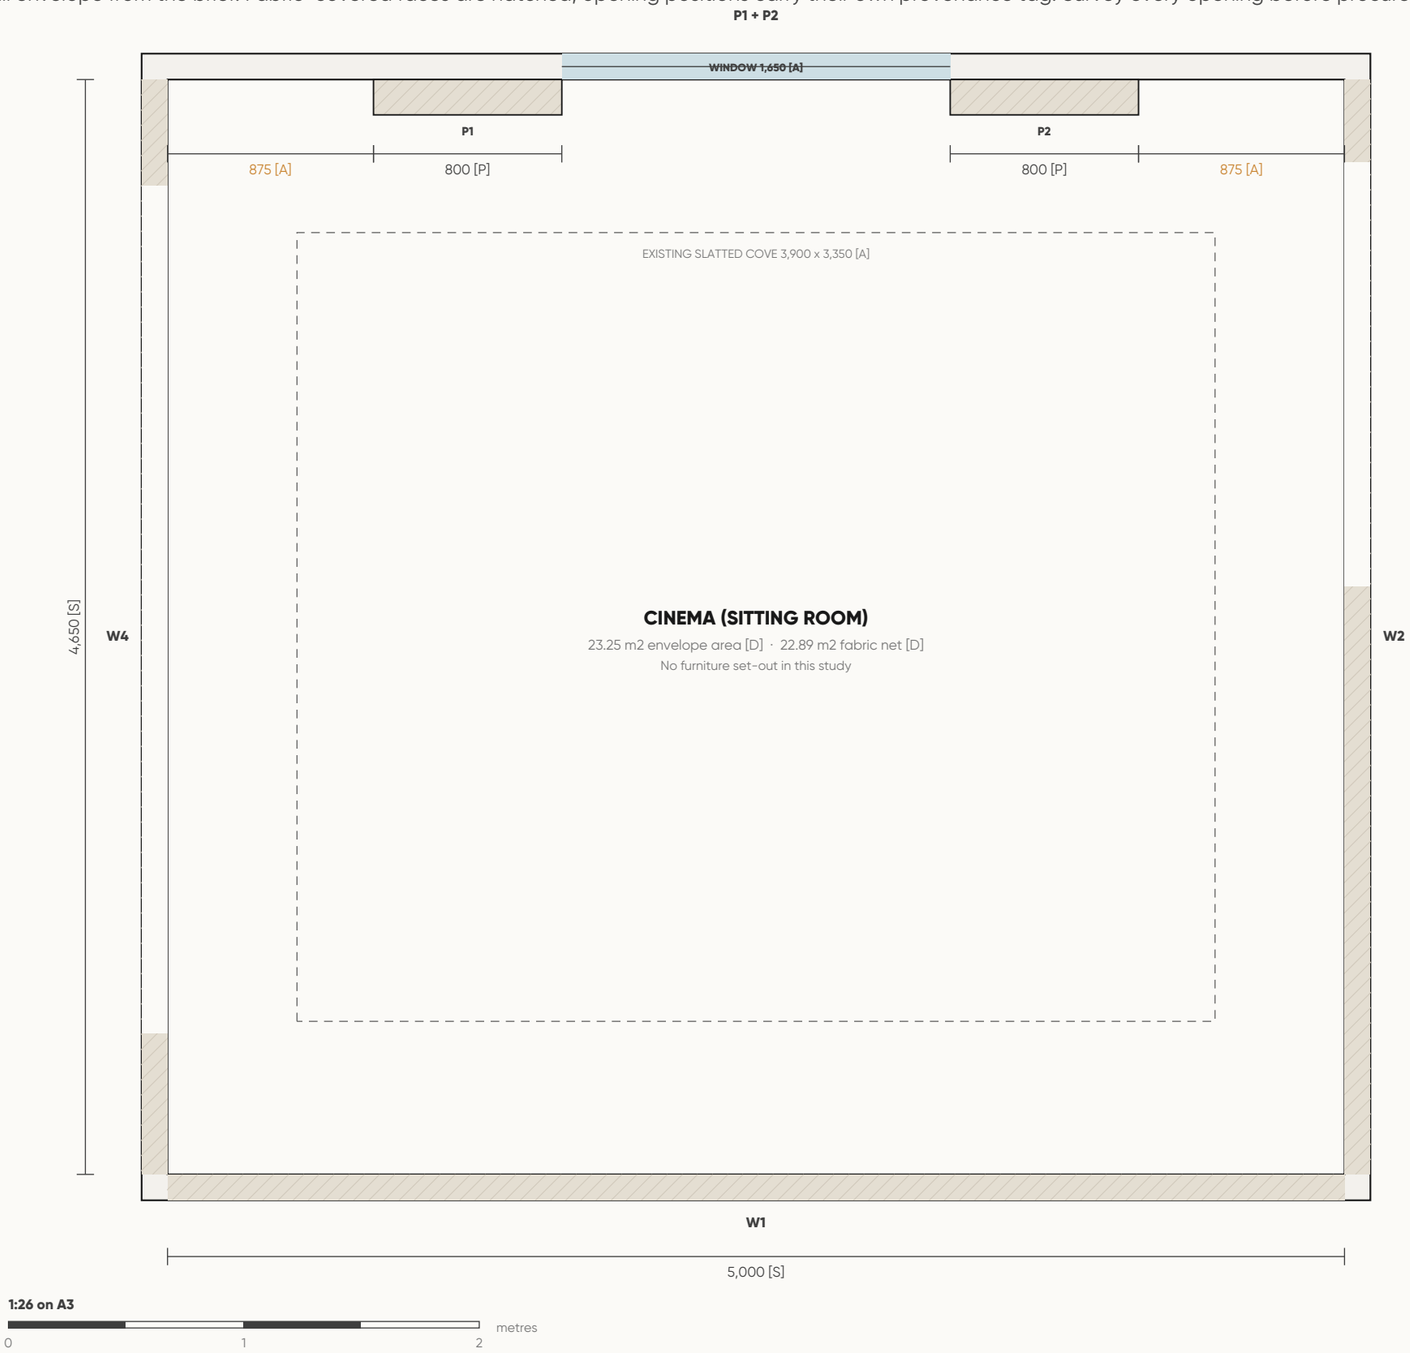

W1 / Feature wall (TV)
5,000 x 2,360 [S]. Screen / TV 1,890 x 1,090 [S]; Recess 1,755 x 350 [A]. The TV and existing oak recess are stacked on one centreline. Dimensions govern this drawing; image-generation proportions do not.

W2 / Wall 2 (right)
4,650 x 2,360 [S]. Double door 1,800 x 2,100 [A]. Plain Lines #10 fabric; no additional side-wall lighting (Option 2).

P1 / Rear pillar (left of window)
800 x 2,200 [P]. No openings. Pier faces beside the rear window: proposal 800 wide [P]; R2 photos suggest ~600 (500–700) — measure. Base 100, projection 150 assumed.

P2 / Rear pillar (right of window)
800 x 2,200 [P]. No openings. as left pillar; W165 rear in-wall could sit behind each pillar fabric (AT) - decide

W4 / Wall 4 (left / garden)
4,650 x 2,360 [S]. Glazed door 3,600 x 2,200 [A]. Garden wall: full-width curtain track (stack at the rear). Plain Lines #10 on the returns; whether the fabric continues behind the curtain is a scope decision for Bryn.

Room datum
Origin is the inside front-left corner at finished floor level. X runs right along the front wall, Y toward the rear, Z rises from F FL. Opening of fsets on the elevations run from the LEFT edge of each wall as you face it from inside the room. Dimensions are treated as substrate (behind-fabric) sizes: the 25 mm track and fabric sit inside them.


S supplied brief **P** source proposal **A** assumed / photo-informed **D** derived

All dimensions in mm. Verify on site. Print at 100%.

GA-02 · DESIGN DEVELOPMENT

Front wall - coordinated elevation

The TV and existing oak recess are stacked on one centreline. Dimensions govern this drawing; image-generation proportions do not.

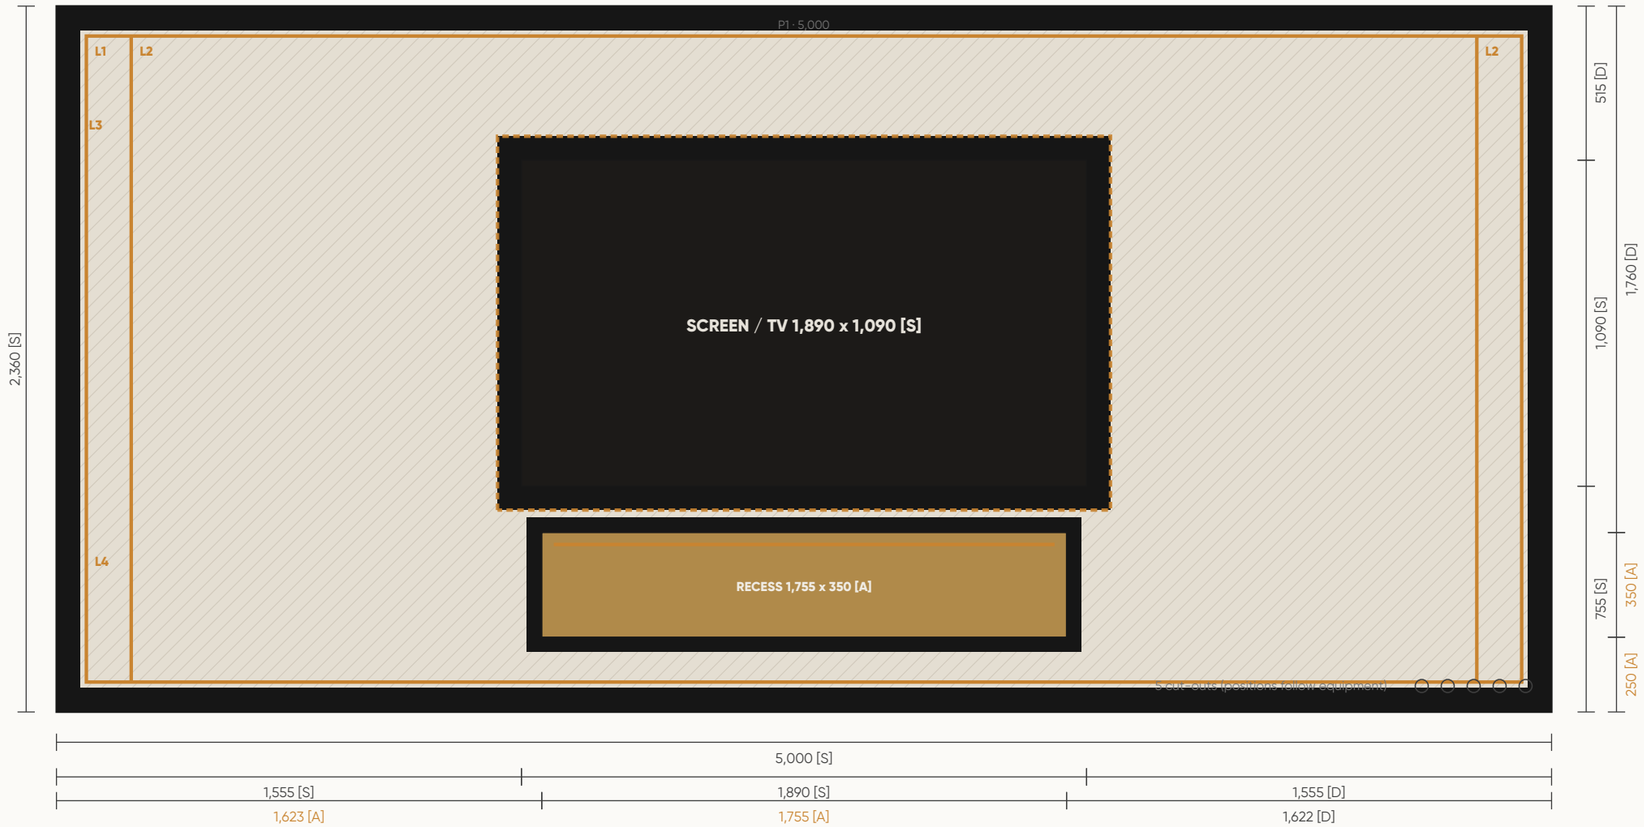

1:21 on A3

0 1 2 metres

Screen / TV datum
1,890 x 1,090 [S]; left edge at 1,555 from the left corner [S]; sill 755, head 1,845 from F FL [S]. Matt-black frame 80 face [A]. 85in Samsung (client) - no fabric behind; gripper round; thick matt-black frame all four sides; TV halo LED

Recess datum
1,755 x 350 [A]; left edge at 1,623 from the left corner [A]; sill 250, head 600 from F FL [A]. Matt-black frame 50 face [A]. Existing oak recess under the TV stays as just done - gripper round; black frame; LED inside under the top lip only. Width / height / bottom level approximate from photos.

Border study
Outer frame 80 face [A], solid matt-black, visible outside the fabric. Confirm the frame section and how it meets the ceiling line.

LED set-out
L1 Perimeter (inside the frame) at 100 inset - 13.92 m; L2 Inset vertical strip at 100 inset at X 250 - 2.16 m; L2 Inset vertical strip at 100 inset at X 4,750 - 2.16 m; L3 Halo behind the screen at 80 inset - 6.28 m; L4 Inside the recess, top lip only - 1.76 m. Routes are indicative [A] - drivers, feeds and corner hardware excluded.

Cut-outs
3 x speaker, 2 x socket - positions follow the installed equipment; not set out here.

Quantity
11.80 m2 gross - 2.67 m2 openings = 9.13 m2 net [D]. Track 24.89 m (14.72 perimeter + 10.17 openings) [D]. 1 panel at 5,000 mm, railroad.

S supplied brief **P** source proposal **A** assumed / photo-informed **D** derived

All dimensions in mm. Verify on site. Print at 100%.

GA-03 · DESIGN DEVELOPMENT

Rear wall - pillars, window and frames

Pier faces beside the rear window: proposal 800 wide [P]; R2 photos suggest ~600 (500–700) — measure. Base 100, projection 150 assumed. Faces drawn at their set-out; the wall between them is not fabric unless listed.



1:21 on A3

0 1 2 metres

P1 - Border study

Outer frame 80 face [A], solid matt-black, visible outside the fabric. Confirm the frame section and how it meets the ceiling line.

P1 - LED set-out

L6 Four-sided frame, inward wash - 6.00 m. Routes are indicative [A] - drivers, feeds and corner hardware excluded.

P1 - Quantity

1.76 m2 gross - 0.00 m2 openings = 1.76 m2 net [D]. Track 6.00 m (6.00 perimeter + 0.00 openings) [D]. 1 panel at 800 mm, railroad.

P2 - Border study

Outer frame 80 face [A], solid matt-black, visible outside the fabric. Confirm the frame section and how it meets the ceiling line.

P2 - LED set-out

L6 Four-sided frame, inward wash - 6.00 m. Routes are indicative [A] - drivers, feeds and corner hardware excluded.

P2 - Cut-outs

1 x speaker - positions follow the installed equipment; not set out here.

P2 - Quantity

1.76 m2 gross - 0.00 m2 openings = 1.76 m2 net [D]. Track 6.00 m (6.00 perimeter + 0.00 openings) [D]. 1 panel at 800 mm, railroad.

S supplied brief **P** source proposal **A** assumed / photo-informed **D** derived


All dimensions in mm. Verify on site. Print at 100%.

GA-04 · DESIGN DEVELOPMENT


Side walls - plain fabric

Opening sizes and of fsets are explicit for coordination. Elevations are viewed face-on; front / rear orientation is identified on each wall.

W2 / WALL 2 (RIGHT) - FRONT AT LEFT, REAR AT RIGHT (viewed from inside the room)

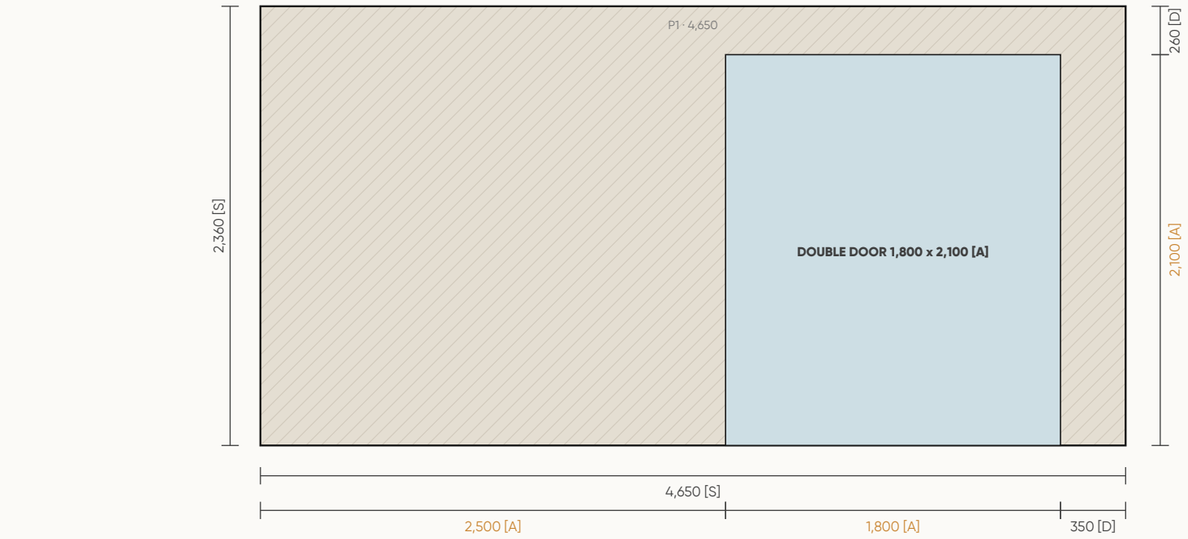

W4 / WALL 4 (LEFT / GARDEN) - REAR AT LEFT, FRONT AT RIGHT (viewed from inside the room)

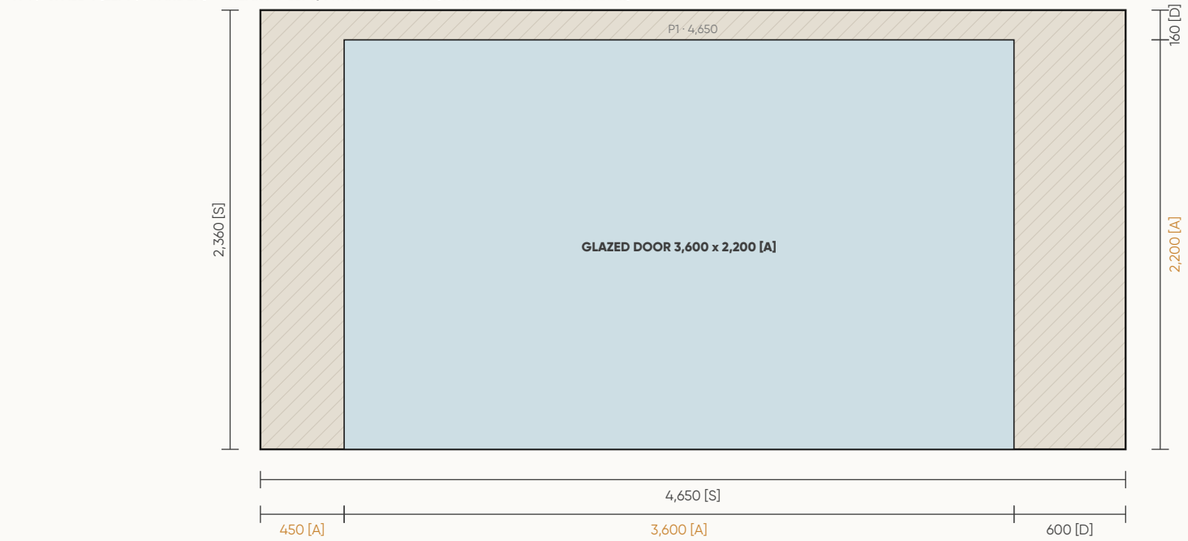

1:33 on A3



W2 opening assumption

Double door 1,800 x 2,100 [A], left edge 2,500 [A] - Internal glazed DOUBLE doors (client, R2) — 2500 from the front corner, 350 return to the rear; leaf split / handing TBC. 7.19 m2 net, 21.82 m track [D].

W4 opening assumption

Glazed door 3,600 x 2,200 [A], left edge 450 [A] - Garden glazing — three tall bays, R2 study 3600 x 2200 (photo range 3000–4000); 600 return at the front, 450 at the rear. Curtain track runs the FULL wall, one-way draw, stack at the rear end only (450 x 200 allowance) — decide whether fabric runs behind the curtain or only on the returns. 3.05 m2 net, 25.62 m track [D].

Finish logic

Plain Lines #10 fabric runs between openings and onto agreed returns. No additional luminous borders, strips or wall lights on either side wall.

Edges and services

Coordinate track around frames, switches and sockets. Keep removable service access. Confirm pull-out so the fabric does not foul door leaves or reveal trims.


S supplied brief **P** source proposal **A** assumed / photo-informed **D** derived

All dimensions in mm. Verify on site. Print at 100%.

GA-05 · DESIGN DEVELOPMENT

Reflected ceiling and lighting plan

Plan reads from below - front wall at bottom, rear at top. The existing ceiling is retained; cove dimensions and the shown LED route are assumed.

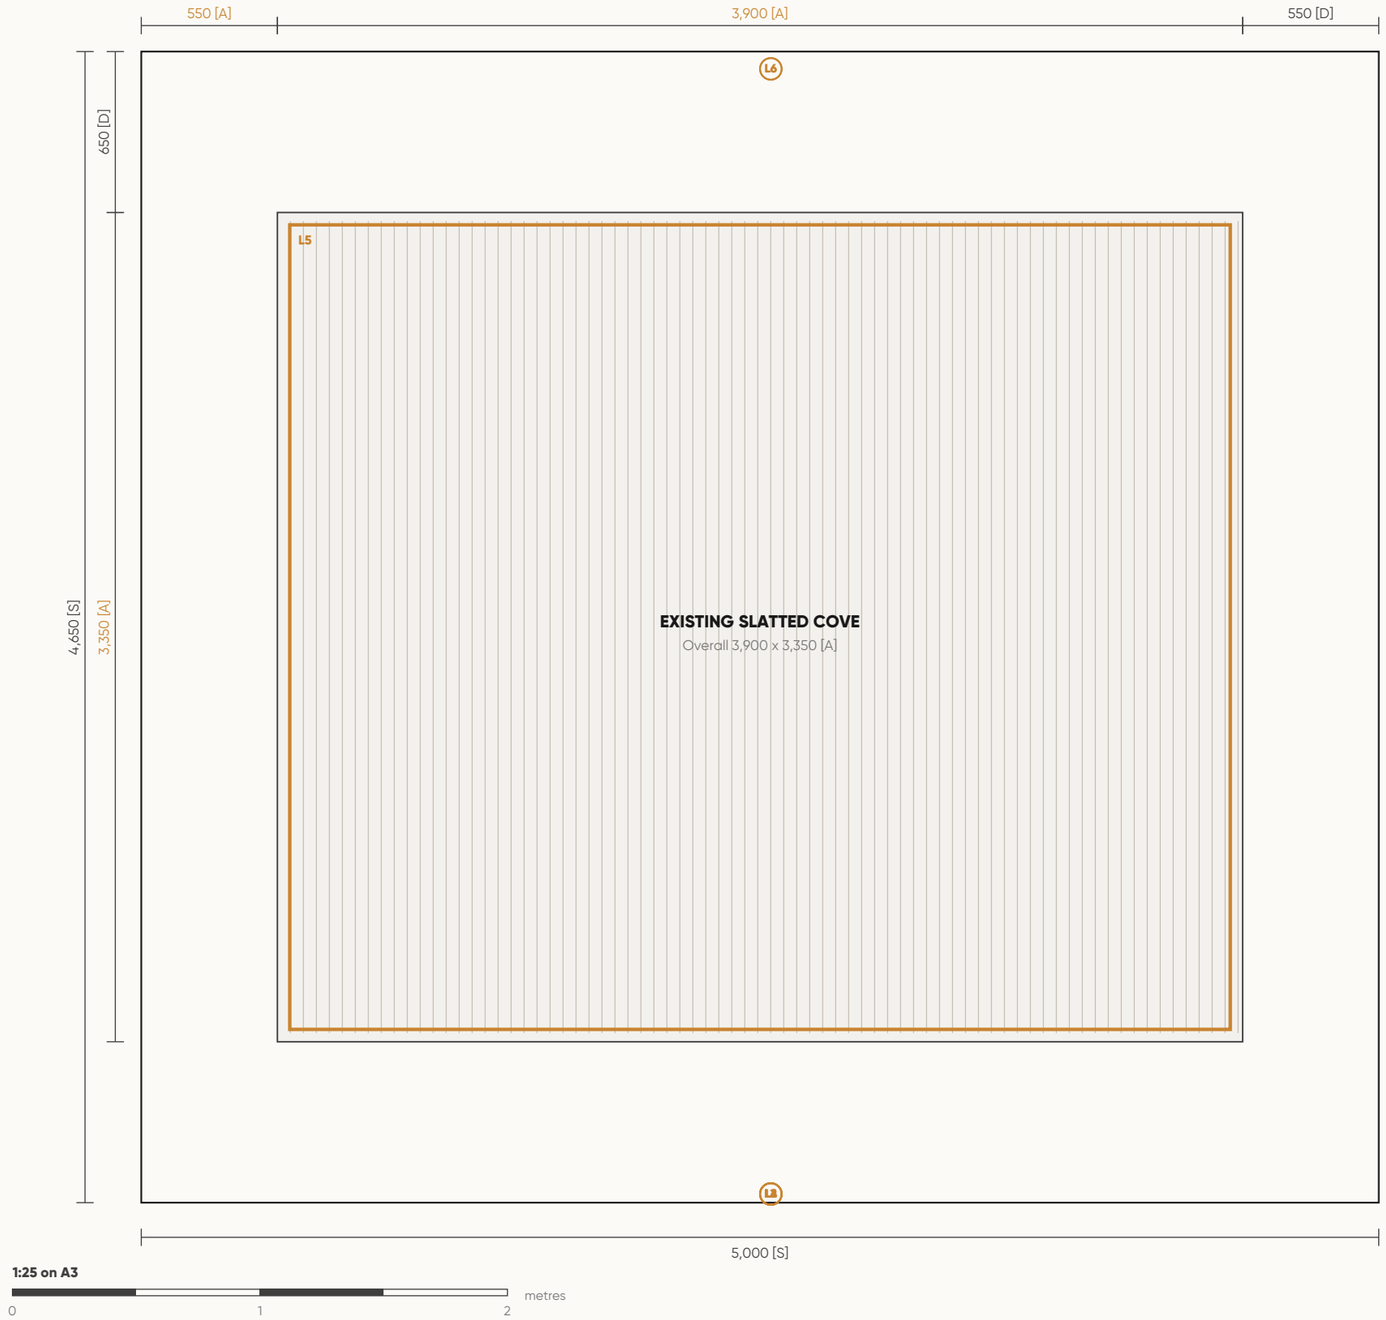

L5 / Existing slatted cove

Concealed 2700 K LED around the inner cove perimeter, 50 inset [A]. Keep the existing timber slats, dif fuser slots and black multi-aperture fittings; LED added around the inner perimeter only. Roller blackout blind inside the rear window reveal (fully up / fully down).

Ceiling geometry

Study margins: 550 left, 650 rear, 550 right, 650 front [D]. Survey cove opening, drop, lip and access.

Control intent

Separate dimming groups: cove, feature-wall perimeter, inset strips, TV halo, recess interior, rear-pillar frames. Final drivers, power, cabling and grouping by the installer.

S supplied brief **P** source proposal **A** assumed / photo-informed **D** derived

All dimensions in mm. Verify on site. Print at 100%.

LT-01 · DESIGN DEVELOPMENT

Lighting intent and indicative routes

All strip dimensions below follow this study geometry, not a measured installation. Route allowances, corner hardware, feeds and drivers are excluded.

GROUP	LOCATION	ASSUMED ROUTE [A]	LENGTH	INTENT
L1	Feature wall (TV) - Perimeter (inside the frame)	4,800 x 2,160 rectangle	13.92 m	All four sides; inward wash inside the black frame
L2	Feature wall (TV) - Inset vertical strip	1 x 2,160 at X 250	2.16 m	Extra strip at X 250
L2	Feature wall (TV) - Inset vertical strip	1 x 2,160 at X 4,750	2.16 m	Extra strip at X 4750
L3	Feature wall (TV) - Halo behind the screen	2,050 x 1,250 rectangle	6.28 m	Low glow behind the black TV reveal
L4	Feature wall (TV) - Inside the recess, top lip only	1 x 1,755 head run	1.76 m	Inside top lip only; no exterior underlight
L6	Rear pillar (left of window) - Four-sided frame, inward wash	800 x 2,200 four-sided	6.00 m	Complete four-sided black frame, LED inward on all four sides
L6	Rear pillar (right of window) - Four-sided frame, inward wash	800 x 2,200 four-sided	6.00 m	As left pillar; W165 rear in-wall could sit behind the fabric (AT)
L5	Existing slatted cove - inner perimeter	3,800 x 3,250 rectangle	14.10 m	Concealed inner perimeter
	Study total	**Calculated centreline routes**	**52.38 m**	**Provisional only; not an order quantity**

Suggested scene control

Presentation: all groups dimmed on. Film: retain a low TV halo, dim or switch of f decorative groups as preferred. These are proposed control scenes, not a selected control product.

Coordination before specification

Check usable LED channel dimensions, heat management, fabric clearance, dif fusers, driver access and dimming compatibility. No wattage, driver count or cable sizing is inferred from renders.

SIDE WALLS: NO ADDITIONAL LED. RECESS: INSIDE LIGHT ONLY. COVE: RETAIN EXISTING GEOMETRY.

S supplied brief **P** source proposal **A** assumed / photo-informed **D** derived

All dimensions in mm. Verify on site. Print at 100%.

DT-01 · DESIGN DEVELOPMENT

Material and edge details

Concept sections explain intent only. Manufacturer profiles, substrate fixings, tolerances and installation clearances require installer coordination.

D1 / TENSIONED FABRIC BUILD-UP



Existing substrate. Cineca G2 gripper — 25 mm (acoustic) [P]. Cineca melamine acoustic foam — 25 mm (self-adhesive) behind the fabric [P]. Tensioned Lines FR #10 Bronze twill. Actual section and fire / acoustic documentation to be confirmed. 25 mm is the proposal system depth, not a verified installed clear dimension.

D2 / BLACK BORDER WITH INWARD LED




Solid matt-black face remains outside the light. Concealed channel aims inward across the fabric. Frame face sizes on the elevations are design assumptions [A]; LED of fsets are not the border face dimension. Confirm the frame section, finish and its junction with the ceiling line.

D3 / RECESS - INSIDE ONLY



Conceal the strip at the internal head of the recess; light falls onto the oak and equipment only. No exterior LED below the frame. Keep equipment access and ventilation. Recess height is approximate [A] - measure before the frame is made.

D4 / FABRIC SAMPLE

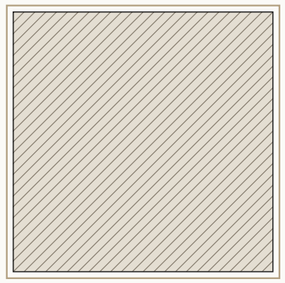

Lines FR - #10 Bronze twill. The physical sample governs; renders exaggerate the weave and do not reproduce the exact colour. Use the lower taupe sample in the supplied photograph (#10); the blue upper sample is #9.

S supplied brief **P** source proposal **A** assumed / photo-informed **D** derived

All dimensions in mm. Verify on site. Print at 100%.

QS-01 · DESIGN DEVELOPMENT

Quantities - show the working

This is the set-out behind the schedule. Gross area per surface, less the recorded openings, equals net fabric. Track = perimeter + around each opening + splits. Nothing here is an order quantity until the survey confirms the geometry.

SURFACE	SIZE	GROSS M2	OPENING DEDUCTION	NET M2	TRACK M (PERIMETER + OPENINGS + SPLITS)	PANELS	CUT-OUTS
W1 / Feature wall (TV)	5,000 x 2,360	11.800	Screen / TV 2.060 + Recess 0.610	9.130	14.72 + 10.17 = 24.89	1 x 5,000	5
W2 / Wall 2 (right)	4,650 x 2,360	10.970	Double door 3.780	7.190	14.02 + 7.80 = 21.82	1 x 4,650	0
P1 / Rear pillar (left of window)	800 x 2,200	1.760	None	1.760	6.00 + 0.00 = 6.00	1 x 800	0
P2 / Rear pillar (right of window)	800 x 2,200	1.760	None	1.760	6.00 + 0.00 = 6.00	1 x 800	1
W4 / Wall 4 (left / garden)	4,650 x 2,360	10.970	Glazed door 7.920	3.050	14.02 + 11.60 = 25.62	1 x 4,650	0
TOTAL / 5 surfaces		**37.260**	**14.370 total deduction**	**22.890**	**84.33 m**	**5 panels**	**6**

Fabric order

18.60 lm of 3000 mm roll = 55.78 m2 ordered for 22.89 m2 finished (railroad, 10% waste, 100 mm grip each edge). Supplier minimum 5 lm.

Track and infill

84.33 m of Cineca G2 gripper — 25 mm (acoustic) (84.33 perimeter + openings, 0.00 splits) in 2 m lengths. 24.05 m2 of Cineca melamine acoustic foam — 25 mm (self-adhesive) = 11 sheets. 563 fixings at 150 mm.

Excluded from this study

Returns, reveals, frame faces, LED channels, substrate preparation, tolerances, waste beyond the cutting allowance and actual roll yield. Concealed speaker positions are not three visible cut-outs.

Reconciliation - GPT R2 study (22 Oct)

GPT R2 study (22 Oct) carries 22.01 m2 net; this set-out gives 22.89 m2 and 84.33 m. A gap usually means a dif ferent opening assumption (GPT R2 assumes 600-wide pier faces and 3600 x 2200 garden glazing; this design keeps the 800 proposal faces and now carries the 3600 glazing and the 1800 double doors) - reconcile on survey, not by averaging.

NO PROCUREMENT TOTAL ISSUED. FABRIC, TRACK, INFILL, LED ROUTES AND DEVICE CUT-OUTS REQUIRE ONE RECONCILED MEASURED SCHEDULE.

DR-01 · DESIGN DEVELOPMENT

Dimension register and survey priorities

No dimension in this issue is site-verified. The tags show where each value came from and how it may be used.

TAG	ITEM	VALUE / BASIS	PROVENANCE	REQUIRED CHECK
S	Room envelope	5,000 W x 4,650 D x 2,360 H	Client brief / survey app	Check substrate vs finished faces; confirm whether lining is included
S	W1 Screen / TV	1,890 x 1,090, left 1,555, sill 755	Client brief	85in Samsung (client) - no fabric behind; gripper round; thick matt-black frame all four sides; TV halo LED
A	W1 Recess	1,755 x 350, left 1,623, sill 250	Photo-informed assumption	Existing oak recess under the TV stays as just done - gripper round; black frame; LED inside under the top lip only. Width / height / bottom level approximate from photos.
A	W1 border face	80 face	Design-development assumption	Approve section, finish and channel detail
A	W2 Double door	1,800 x 2,100, left 2,500, sill 0	Photo-informed assumption	Internal glazed DOUBLE doors (client, R2) — 2500 from the front corner, 350 return to the rear; leaf split / handing TBC
P	P1 Rear pillar (left of window)	800 x 2,200	Proposal / photo	Measure face, base level and projection
A	P1 border face	80 face	Design-development assumption	Approve section, finish and channel detail
P	P2 Rear pillar (right of window)	800 x 2,200	Proposal / photo	Measure face, base level and projection
A	P2 border face	80 face	Design-development assumption	Approve section, finish and channel detail
A	W4 Glazed door	3,600 x 2,200, left 450, sill 0	Photo-informed assumption	Garden glazing — three tall bays, R2 study 3600 x 2200 (photo range 3000–4000); 600 return at the front, 450 at the rear. Curtain track runs the FULL wall, one-way draw, stack
A	Existing slatted cove	3,900 x 3,350 at 550 / 650, LED inset 50	Photo-informed	Survey opening, drop, lip and access
A	Window	1,650 x 1,900, sill 250	Photo-informed	Measure width, reveal and sill
P	Track / infill / roll	25 mm track, 25 mm infill, 3000 mm roll railroad	Source proposal / Library	Confirm system, roll orientation and approvals
D	Net fabric / track	22.89 m2 / 84.33 m	Arithmetic from the above	Only valid once inputs and set-out are confirmed

Survey first

Room clear widths / depth / height and diagonals; double-door outer frame and hinge handing; garden frame size, of fsets and threshold; rear window frame, sill, head and reveals; both pier fronts, returns and projections; TV casing and bracket; oak recess width / height / depth and floor datum; cove aperture, drop, lip and every service fitting; curtain track fixing zone and true stack depth; blind cassette clearance; driver and access positions.

DRAWINGS ARE COORDINATED STUDY GEOMETRY. DO NOT SCALE FROM AI VISUALISATIONS OR FABRICATE FROM ASSUMPTIONS.

RETAINED COMPARISON · DESIGN DEVELOPMENT

Further views

The remaining selected visualisations, kept for comparison.



OPTION 2 – FEATURE WALL WITH THE SIDE WALLS IN FABRIC (NO SIDE-WALL LE



OPTION 2 – REAR: SIDE WALLS IN FABRIC, PILLARS + COVE LED

Source record

Drawn from Stretched Fabric design 31 Prestbury Road (fabric_configs), the Library (Cineca pricelist, filed 2026-10-22) and the project record. Every value above can be traced to the app; change the design there and re-issue this pack rather than editing the drawings.

Proposal reference

SNR-SF-261022-S22T

Commercials are carried on the formal Sonor quotation, which governs. This pack sets out the design and the geometry only.

SONOR

Smart homes, beautifully done.

NEW PROJECTS & PROPOSALS

projects@sonor.co.uk

TELEPHONE

+44 7933 684 000

SERVICE & SUPPORT

service@sonor.co.uk

WEB

sonor.co.uk

Sonor Ltd · Chester, England · Trusted by homeowners across the North West & Wales

CEDIA MEMBER