SONOR



STRETCHED FABRIC PROPOSAL

31 Prestbury Road

Stretched fabric walls & ceilings · 1 room

PREPARED FOR
Leena Bhavsar

PROJECT
31 Prestbury Road

REFERENCE
SNR-SF-261022-N5TY

CEDIA MEMBER

STRETCHED FABRIC

31 Prestbury Road

Stretched fabric turns walls and ceilings into one seamless, tailored surface — the fabric is tensioned into a concealed perimeter track with acoustic infill behind, so speakers, lighting and the structure disappear into a single finish.

ROOMS
Cinema (Sitting Room)

FINISHED AREA
30.1 sqm across 6 walls

PANELS
6 fabric panels · 116.3 m of track

FABRIC
Lines FR · #10 Bronze twill

SYSTEM
Cineca G2 gripper — 25 mm (acoustic)

ACOUSTIC INFILL
31.6 sqm

DEVICE CUT-OUTS
6

IN THIS PROPOSAL

- Introduction
- Visualisations
- Cinema (Sitting Room)
- Fabric & colour
- The system
- Schedule

THE FINISHED ROOM

Visualisations

Visualisations of the finished room, produced from the photographs and the design — the fabric, the seams and the light as they will be.



Option 1 — feature wall: Lines FR #10, black frame, perimeter + inset LED, TV halo, lit recess



Option 1 — rear: fabric pillars either side of the window, cove LED



Option 2 — feature wall with the side walls in fabric (no side-wall LED)



Option 2 — rear: side walls in fabric, pillars + cove LED



Front – daytime, all lighting and TV of f



Rear – daytime, all lighting and TV of f



Front — furnished, dusk, curtains open



Rear — furnished, dusk, curtains open

GF · ROOM

Cinema (Sitting Room)

Every surface is set out from the room geometry — wall lengths from the room plan, heights from the project record — so what is shown here is what will be installed.

FABRIC

Lines FR · acoustically transparent · #10 Bronze twill

SYSTEM

Cineca G2 gripper — 25 mm (acoustic) with Cineca melamine acoustic foam — 25 mm (self-adhesive)

SET-OUT


Railroaded · 6 panels · height 2360 mm

FINISHED AREA


30.1 sqm · 116.3 m track · 31.6 sqm infill · 6 cut-outs

ELEVATIONS · SEAMS = SPLIT TRACK · OPENINGS SET OUT FROM THE LEFT


Feature wall (TV) · 1 × 5000 mm · 2 openings · 5 cut-outs

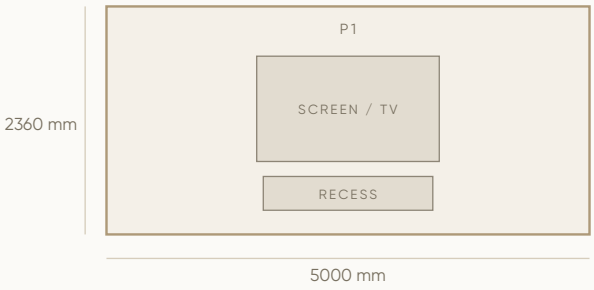

Wall 2 (right) · 1 × 4650 mm · 1 opening

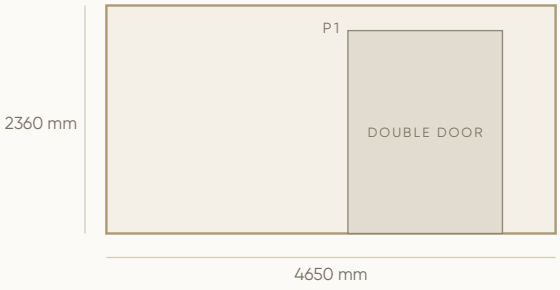


Wall 3 (rear) · 1 × 5000 mm · 3 openings

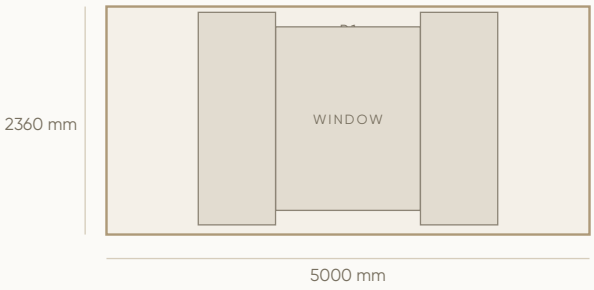


ELEVATIONS · SEAMS = SPLIT TRACK · OPENINGS SET OUT FROM THE LEFT


Rear pillar (left of window) · 1 × 800 mm

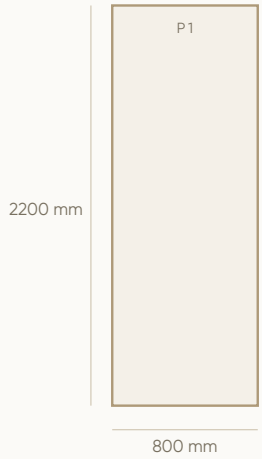

Rear pillar (right of window) · 1 × 800 mm · 1 cut-outs

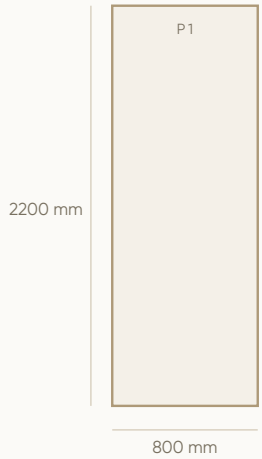

Wall 4 (left / garden) · 1 × 4650 mm · 1 opening

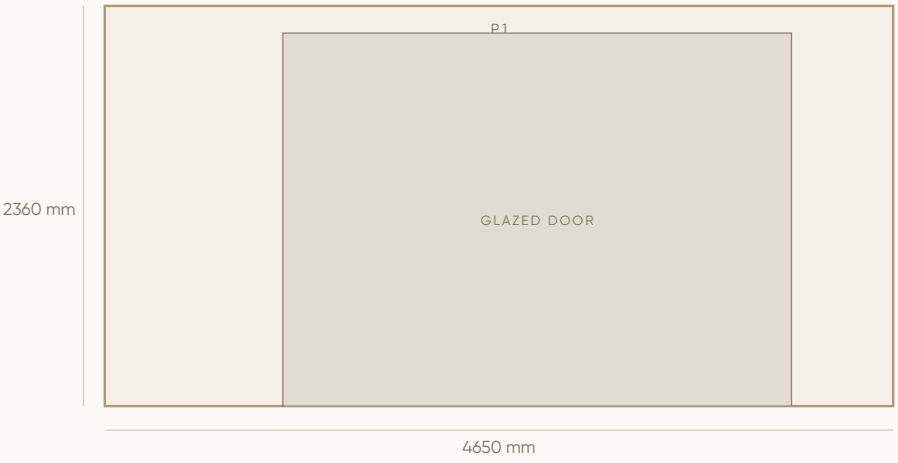

SIMULATION

Cinema (Sitting Room)

Photographs of the room as it is today, with the chosen fabric and lighting laid over the walls — the panel seams fall exactly where the set-out puts them, and the room keeps its own light.



Feature wall (TV) in Lines FR · #10 Bronze twill · LED: Ceiling cove

A simulation on the client's own photograph — colour, seams and light are indicative; physical samples govern the finish.

THE FINISH

Fabric & colour

Fabrics are chosen from the Sonor library — luxury velvets and FR weaves for feature walls, acoustically transparent cloths where loudspeakers sit behind the finish. Physical samples are approved before any order is placed.



CINEMA (SITTING ROOM)

Lines FR · AT

#10 Bronze twill · Cineca · 3 m roll

Herringbone / twill textured weave, FR · acou

Physical samples of every fabric and colourway are approved before any order is placed.

TRACK & INFILL

The system

The track depth sets what sits behind the fabric. A 12 mm track carries fabric alone; 25 mm and 50 mm acoustic tracks hold a mineral-wool infill that lets the surface absorb sound as well as look the part.

TRACK

Cineca G2 gripper — 25 mm (acoustic) · 25 mm — Acoustic track · 25 mm infill behind the fabric · AT fabrics

ACOUSTIC INFILL

Cineca melamine acoustic foam — 25 mm (self-adhesive) · 25 mm behind the fabric

SEAMS

Split track at every panel joint; fabric tensioned into the perimeter track with the edge concealed

USED IN

Cinema (Sitting Room)

HOW IT GOES TOGETHER

- Perimeter track is fixed to the substrate around every surface and around every opening.
- Acoustic infill (where specified) is fitted inside the track depth, flush with the track face.
- Fabric is cut with a tensioning allowance on every edge, stretched and tucked into the track — no visible fixings, no seams except at split tracks.
- Device cut-outs are formed on site at the installed positions of speakers, lights, keypads and grilles.

QUANTITIES

Schedule

Quantities carried on the quotation: fabric by the square metre per surface, track by the metre, infill by the square metre, and a cut-out for every device that passes through the finish.

ROOM	FABRIC	SQM	PANELS	TRACK M	INFILL SQM	CUT-OUTS
Cinema (Sitting Room)	Lines FR · #10 Bronze twill	30.1	6	116.3	31.6	6
Total		**30.1**	**6**	**116.3**	**31.6**	**6**

Cinema room: the Cinema Takeoff model carries 57.8 m of track and 1.2 sqm of fabric from the drawn walls — the drawn model governs for that room.

THE SELECTED SCHEME · DESIGN DEVELOPMENT

Fabric throughout. Light where it matters.

Option 2 carries Lines #10 onto the side walls without adding side-wall LEDs. Existing architectural features remain the basis.



01 · OPTION 1 – FEATURE WALL: LINES FR #10, BLACK FRAME, PERIMETER + INSET



02 · OPTION 1 – REAR: FABRIC PILLARS EITHER SIDE OF THE WINDOW, COVE LED

FABRIC

Lines FR #10 / physical sample governs

BORDERS

Matt black / all four sides

LIGHT


Warm 2700 K / separate dimming groups

Visualisations show design intent; fabric texture, apparent dimensions and light levels are illustrative.

GA-01 · DESIGN DEVELOPMENT

Room plan and fabric extents

Overall envelope from the brief. Fabric-covered faces are hatched; opening positions carry their own provenance tag. Survey every opening before procurement.

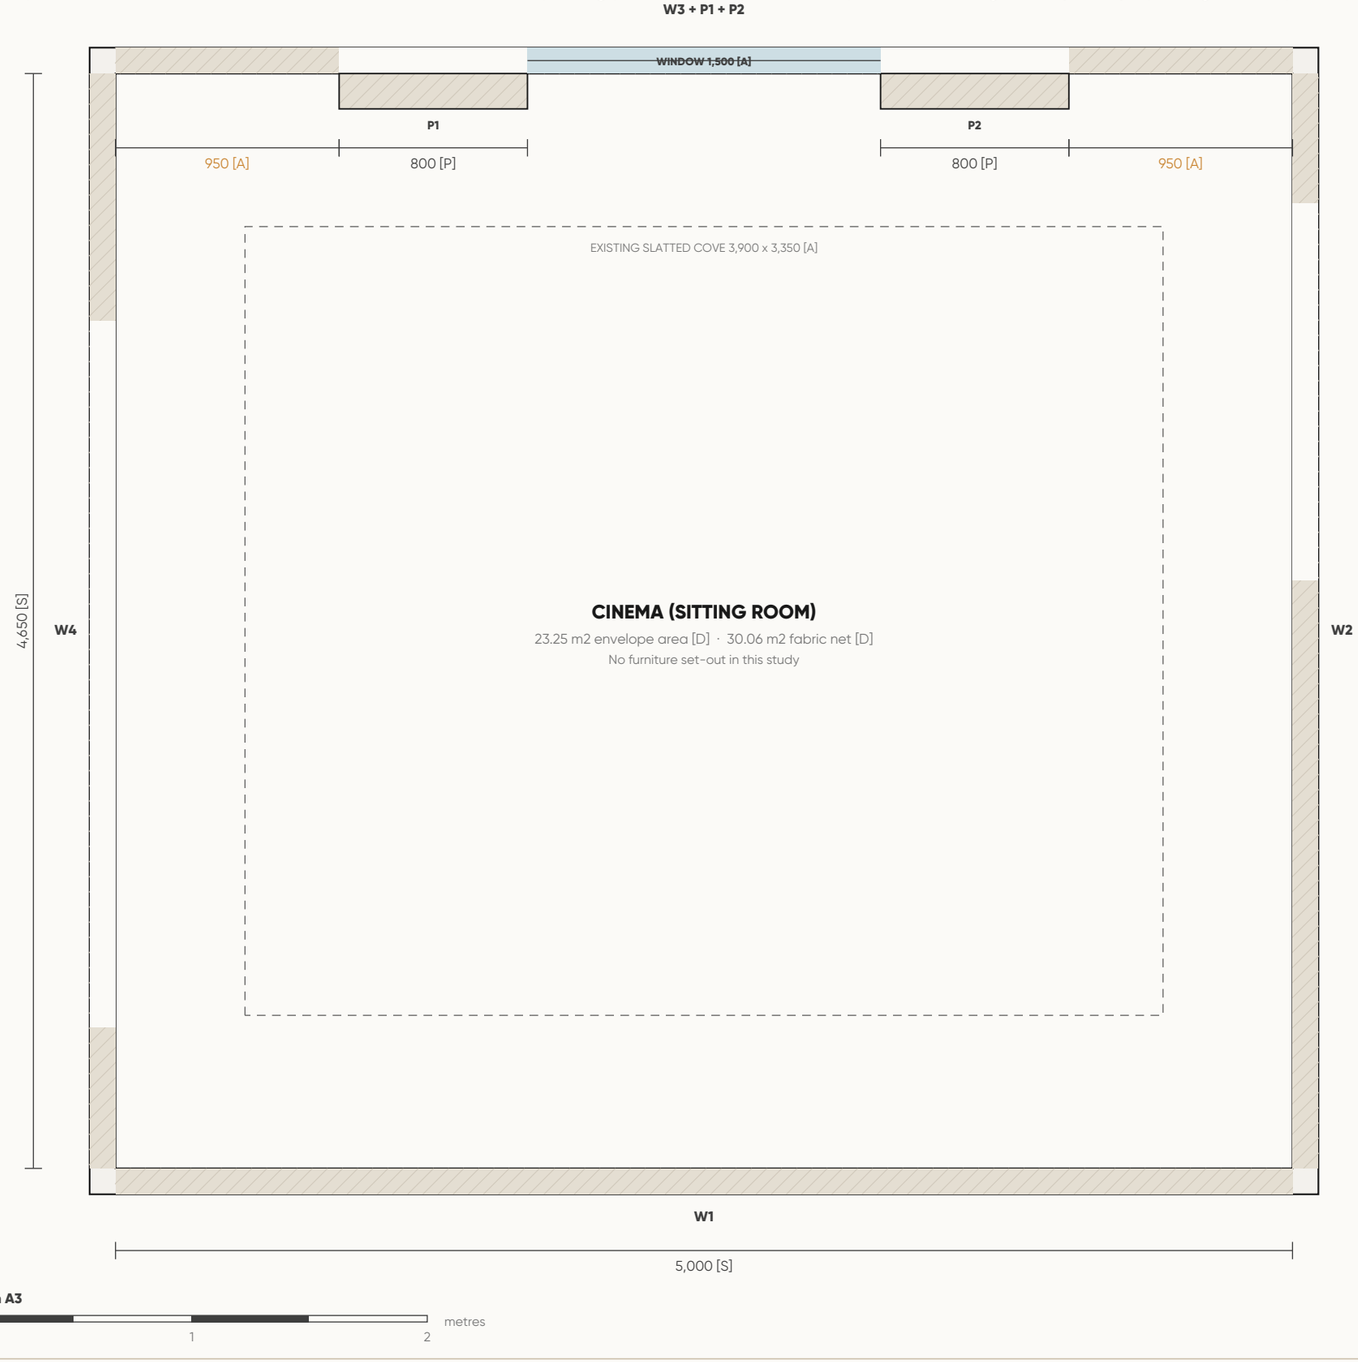

W1 / Feature wall (TV)
5,000 x 2,360 [S]. Screen / TV 1,890 x 1,090 [S]; Recess 1,755 x 350 [A]. The TV and existing oak recess are stacked on one centreline. Dimensions govern this drawing; image-generation proportions do not.

W2 / Wall 2 (right)
4,650 x 2,360 [S]. Double door 1,600 x 2,100 [A]. Plain Lines #10 fabric; no additional side-wall lighting (Option 2).

W3 / Wall 3 (rear)
5,000 x 2,360 [S]. Window 1,500 x 1,900 [A]; Pier face 800 x 2,200 [P]; Pier face 800 x 2,200 [P]. Rear wall in fabric: flanks beside the piers and the band above the window; the window (low end of the photo range) and both pier footprints are openings. Pier returns (150 deep) not counted - inside the high estimate.

P1 / Rear pillar (left of window)
800 x 2,200 [P]. No openings. Pier faces beside the rear window: proposal 800 wide [P]; R2 photos suggest ~600 (500–700) — measure. Base 100, projection 150 assumed.

P2 / Rear pillar (right of window)
800 x 2,200 [P]. No openings. as left pillar; W165 rear in-wall could sit behind each pillar fabric (AT) - decide

W4 / Wall 4 (left / garden)
4,650 x 2,360 [S]. Glazed door 3,000 x 2,200 [A]. Fabric covers the whole garden wall except the glazing; the curtain track runs the full wall, one-way draw, stack at the rear (450 x 200 allowance).

Room datum
Origin is the inside front-left corner at finished floor level. X runs right along the front wall, Y toward the rear, Z rises from F FL. Opening of fsets on the elevations run from the LEFT edge of each wall as you face it from inside the room. Dimensions are treated as substrate (behind-fabric) sizes: the 25 mm track and fabric sit inside them.


S supplied brief **P** source proposal **A** assumed / photo-informed **D** derived

All dimensions in mm. Verify on site. Print at 100%.

GA-02 · DESIGN DEVELOPMENT

Front wall - coordinated elevation

The TV and existing oak recess are stacked on one centreline. Dimensions govern this drawing; image-generation proportions do not.

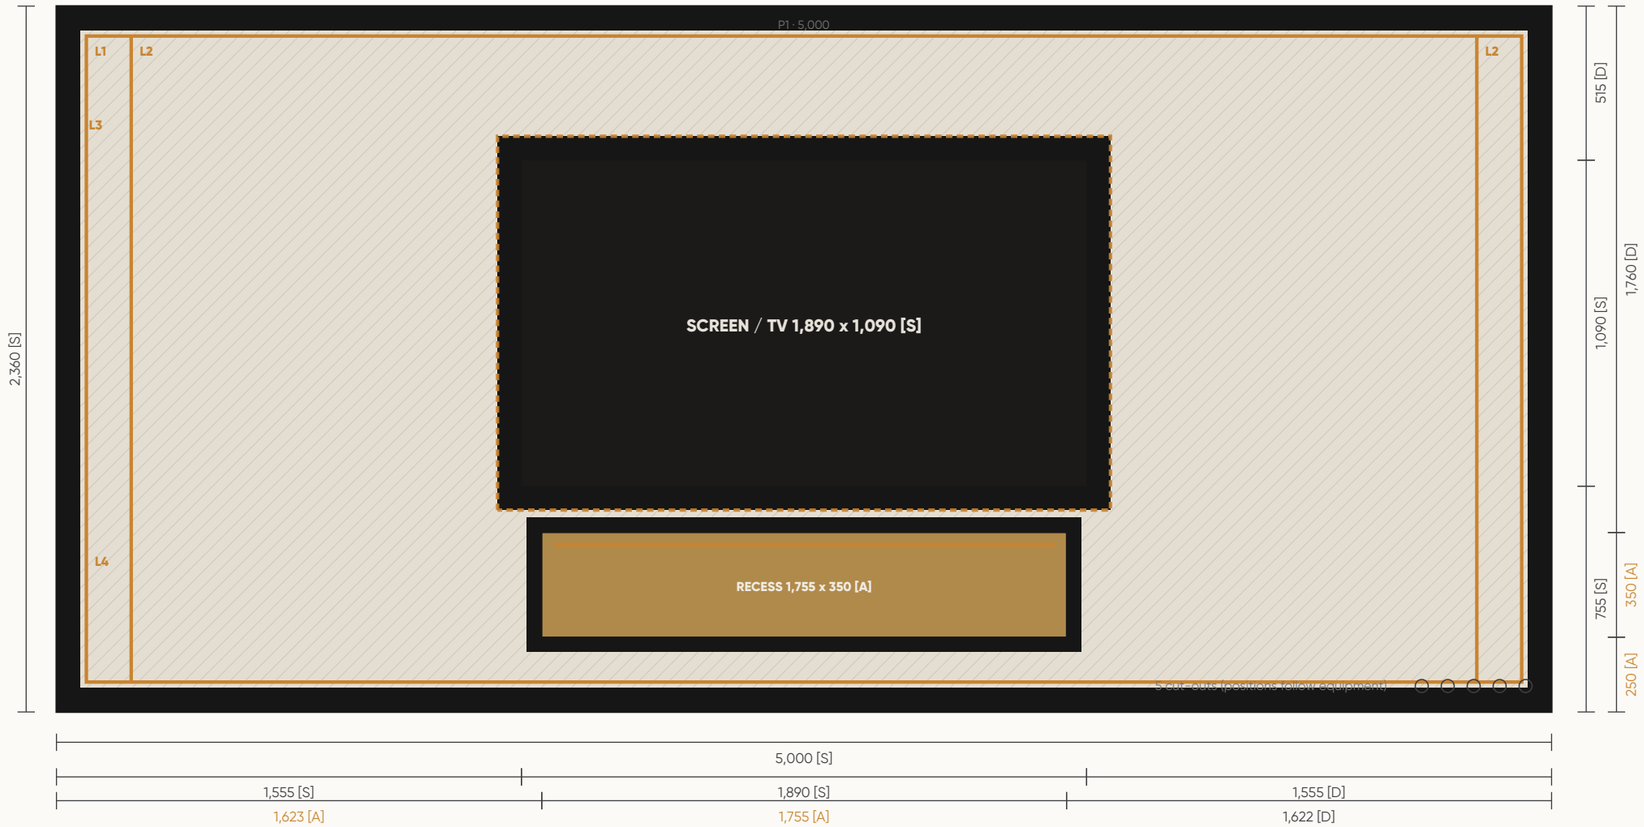

1:21 on A3

0 1 2 metres

Screen / TV datum

1,890 x 1,090 [S]; left edge at 1,555 from the left corner [S]; sill 755, head 1,845 from F FL [S]. Matt-black frame 80 face [A]. 85in Samsung (client) - no fabric behind; gripper round; thick matt-black frame all four sides; TV halo LED

Recess datum

1,755 x 350 [A]; left edge at 1,623 from the left corner [A]; sill 250, head 600 from F FL [A]. Matt-black frame 50 face [A]. Existing oak recess under the TV stays as just done - gripper round; black frame; LED inside under the top lip only. Width / height / bottom level approximate from photos.

Border study

Outer frame 80 face [A], solid matt-black, visible outside the fabric. Confirm the frame section and how it meets the ceiling line.

LED set-out

L1 Perimeter (inside the frame) at 100 inset - 13.92 m; L2 Inset vertical strip at 100 inset at X 250 - 2.16 m; L2 Inset vertical strip at 100 inset at X 4,750 - 2.16 m; L3 Halo behind the screen at 80 inset - 6.28 m; L4 Inside the recess, top lip only - 1.76 m. Routes are indicative [A] - drivers, feeds and corner hardware excluded.

Cut-outs

3 x speaker, 2 x socket - positions follow the installed equipment; not set out here.

Quantity

11.80 m2 gross - 2.67 m2 openings = 9.13 m2 net [D]. Track 24.89 m (14.72 perimeter + 10.17 openings) [D]. 1 panel at 5,000 mm, railroad.

S supplied brief **P** source proposal **A** assumed / photo-informed **D** derived

All dimensions in mm. Verify on site. Print at 100%.

GA-03 · DESIGN DEVELOPMENT

Rear wall - pillars, window and frames

Rear wall in fabric: flanks beside the piers and the band above the window; the window (low end of the photo range) and both pier footprints are openings. Pier returns (150 deep) not counted - inside the high estimate. Faces drawn at their set-out; the wall between them is not fabric unless listed.



1:21 on A3

0 1 2 metres

W3 - Window datum
1,500 x 1,900 [A]; left edge at 1,750 from the right corner [A]; sill 250, head 2,150 from F FL [A]. Two-pane window, low sill. Photo range W 1500–1800 / H 1750–2050 — low end used; roller blackout blind inside the reveal

W3 - Pier face datum
800 x 2,200 [P]; left edge at 950 from the right corner [P]; sill 100, head 2,300 from F FL [P]. P1 footprint — the framed fabric face is its own surface

W3 - Pier face datum
800 x 2,200 [P]; left edge at 3,250 from the right corner [P]; sill 100, head 2,300 from F FL [P]. P2 footprint — the framed fabric face is its own surface

W3 - Quantity
11.80 m2 gross - 6.37 m2 openings = 5.43 m2 net [D]. Track 33.52 m (14.72 perimeter + 18.80 openings) [D]. 1 panel at 5,000 mm, railroad.

P1 - Border study
Outer frame 80 face [A], solid matt-black, visible outside the fabric. Confirm the frame section and how it meets the ceiling line.

P1 - LED set-out
L6 Four-sided frame, inward wash - 6.00 m. Routes are indicative [A] - drivers, feeds and corner hardware excluded.

P1 - Quantity
1.76 m2 gross - 0.00 m2 openings = 1.76 m2 net [D]. Track 6.00 m (6.00 perimeter + 0.00 openings) [D]. 1 panel at 800 mm, railroad.

P2 - Border study
Outer frame 80 face [A], solid matt-black, visible outside the fabric. Confirm the frame section and how it meets the ceiling line.

P2 - LED set-out
L6 Four-sided frame, inward wash - 6.00 m. Routes are indicative [A] - drivers, feeds and corner hardware excluded.

P2 - Cut-outs
1 x speaker - positions follow the installed equipment; not set out here.

P2 - Quantity
1.76 m2 gross - 0.00 m2 openings = 1.76 m2 net [D]. Track 6.00 m (6.00 perimeter + 0.00 openings) [D]. 1 panel at 800 mm, railroad.

S supplied brief **P** source proposal **A** assumed / photo-informed **D** derived


All dimensions in mm. Verify on site. Print at 100%.

GA-04 · DESIGN DEVELOPMENT


Side walls - plain fabric

Opening sizes and of fsets are explicit for coordination. Elevations are viewed face-on; front / rear orientation is identified on each wall.

W2 / WALL 2 (RIGHT) - FRONT AT LEFT, REAR AT RIGHT (viewed from inside the room)

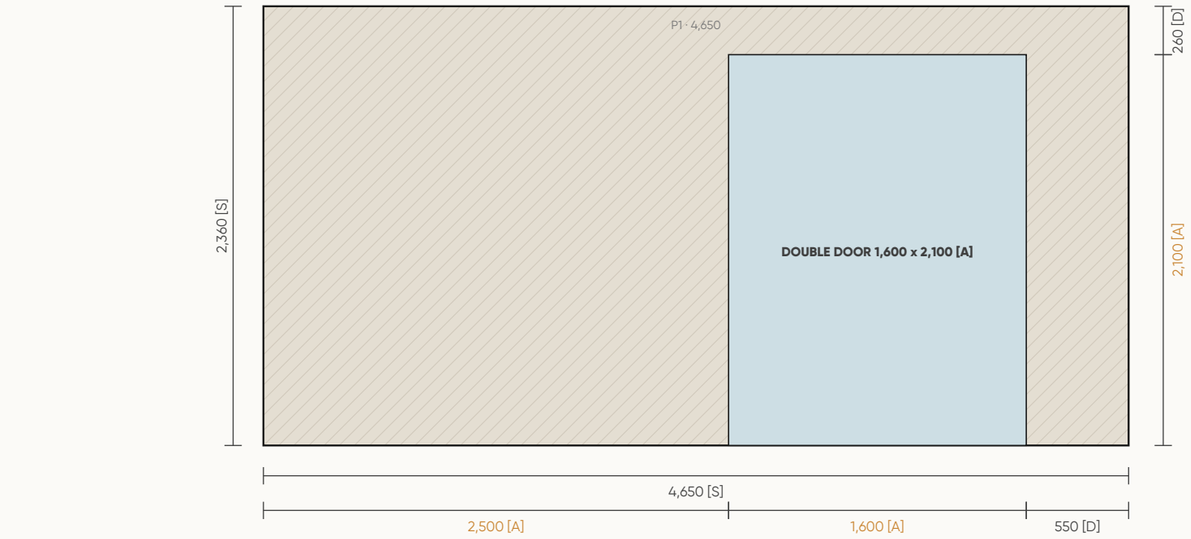

W4 / WALL 4 (LEFT / GARDEN) - REAR AT LEFT, FRONT AT RIGHT (viewed from inside the room)

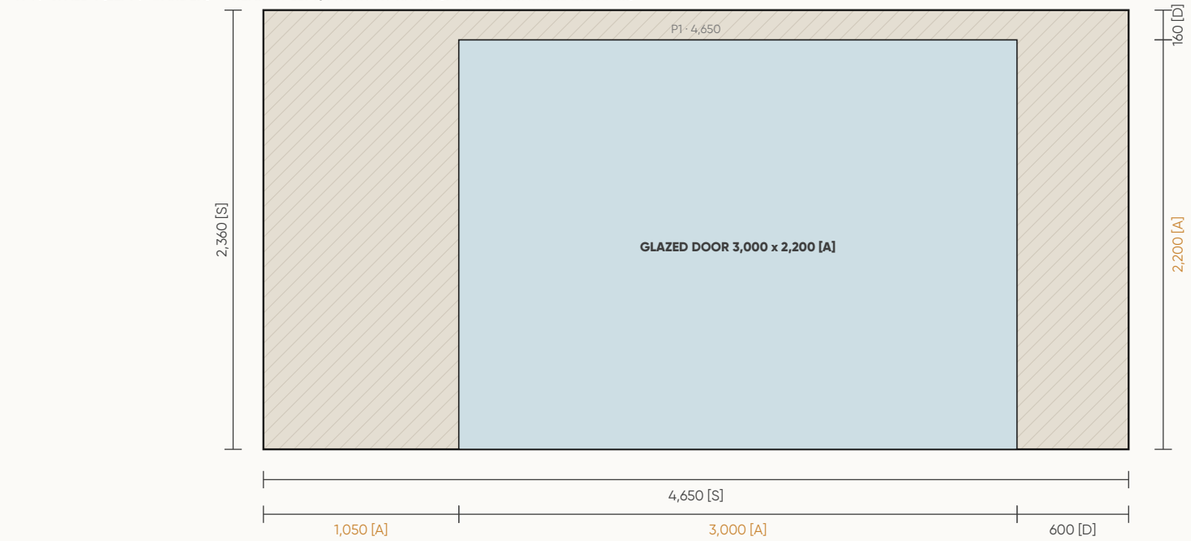

1:33 on A3



W2 opening assumption

Double door 1,600 x 2,100 [A], left edge 2,500 [A] - Internal glazed DOUBLE doors (client, R2). Photo range W 1600–1900 — low end used so the fabric estimate sits high; 2500 from the front corner; leaf split / handing TBC. 7.61 m2 net, 21.42 m track [D].

W4 opening assumption

Glazed door 3,000 x 2,200 [A], left edge 1,050 [A] - Garden glazing, three tall bays. Photo range W 3000–4000 — low end used (high fabric estimate); 600 return at the front, 1050 at the rear. Fabric runs behind the full-wall curtain (Bryn 22 Oct); curtain stacks at the rear end only. 4.37 m2 net, 24.42 m track [D].

Finish logic

Fabric covers every wall area except doors, glazing and the window (Bryn 22 Oct); estimate taken at the high end until the openings are measured.

Edges and services

Coordinate track around frames, switches and sockets. Keep removable service access. Confirm pull-out so the fabric does not foul door leaves or reveal trims.


S supplied brief **P** source proposal **A** assumed / photo-informed **D** derived

All dimensions in mm. Verify on site. Print at 100%.

GA-05 · DESIGN DEVELOPMENT

Reflected ceiling and lighting plan

Plan reads from below - front wall at bottom, rear at top. The existing ceiling is retained; cove dimensions and the shown LED route are assumed.

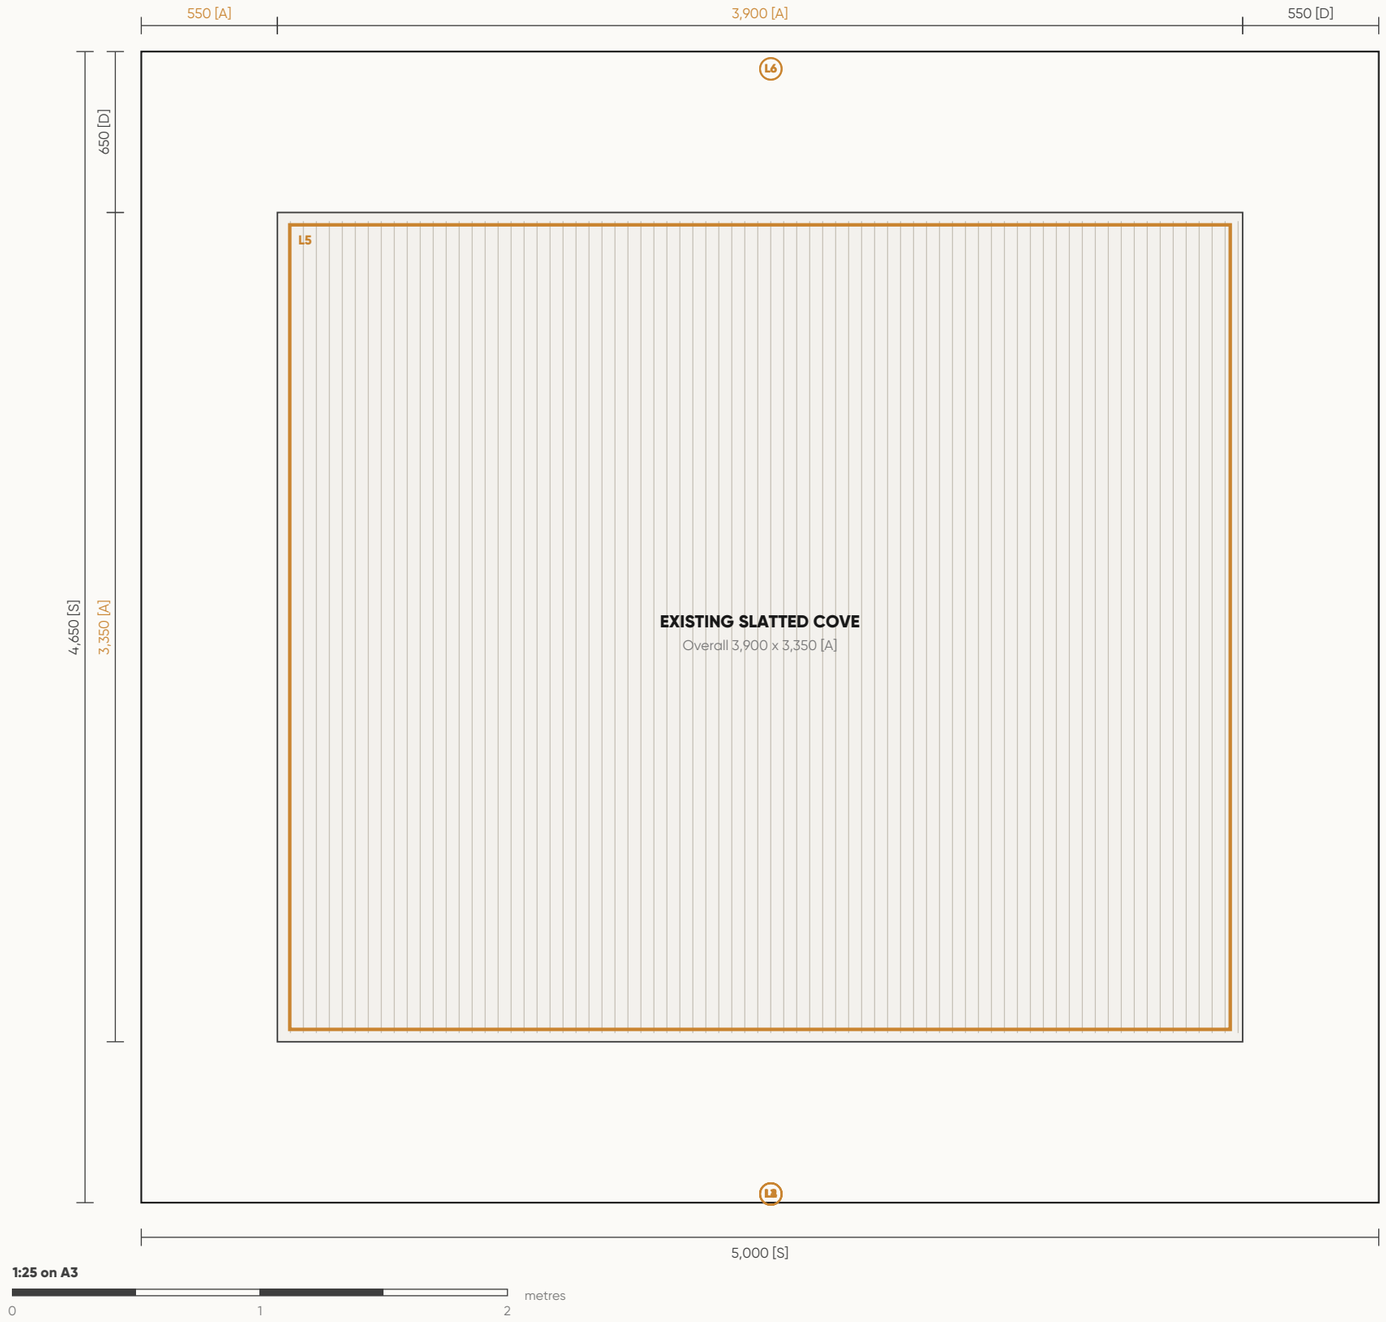

L5 / Existing slatted cove

Concealed 2700 K LED around the inner cove perimeter, 50 inset [A]. Keep the existing timber slats, dif fuser slots and black multi-aperture fittings; LED added around the inner perimeter only. Roller blackout blind inside the rear window reveal (fully up / fully down).

Ceiling geometry

Study margins: 550 left, 650 rear, 550 right, 650 front [D]. Survey cove opening, drop, lip and access.

Control intent

Separate dimming groups: cove, feature-wall perimeter, inset strips, TV halo, recess interior, rear-pillar frames. Final drivers, power, cabling and grouping by the installer.

S supplied brief **P** source proposal **A** assumed / photo-informed **D** derived

All dimensions in mm. Verify on site. Print at 100%.

LT-01 · DESIGN DEVELOPMENT

Lighting intent and indicative routes

All strip dimensions below follow this study geometry, not a measured installation. Route allowances, corner hardware, feeds and drivers are excluded.

GROUP	LOCATION	ASSUMED ROUTE [A]	LENGTH	INTENT
L1	Feature wall (TV) - Perimeter (inside the frame)	4,800 x 2,160 rectangle	13.92 m	All four sides; inward wash inside the black frame
L2	Feature wall (TV) - Inset vertical strip	1 x 2,160 at X 250	2.16 m	Extra strip at X 250
L2	Feature wall (TV) - Inset vertical strip	1 x 2,160 at X 4,750	2.16 m	Extra strip at X 4750
L3	Feature wall (TV) - Halo behind the screen	2,050 x 1,250 rectangle	6.28 m	Low glow behind the black TV reveal
L4	Feature wall (TV) - Inside the recess, top lip only	1 x 1,755 head run	1.76 m	Inside top lip only; no exterior underlight
L6	Rear pillar (left of window) - Four-sided frame, inward wash	800 x 2,200 four-sided	6.00 m	Complete four-sided black frame, LED inward on all four sides
L6	Rear pillar (right of window) - Four-sided frame, inward wash	800 x 2,200 four-sided	6.00 m	As left pillar; W165 rear in-wall could sit behind the fabric (AT)
L5	Existing slatted cove - inner perimeter	3,800 x 3,250 rectangle	14.10 m	Concealed inner perimeter
	Study total	**Calculated centreline routes**	**52.38 m**	**Provisional only; not an order quantity**

Suggested scene control

Presentation: all groups dimmed on. Film: retain a low TV halo, dim or switch of f decorative groups as preferred. These are proposed control scenes, not a selected control product.

Coordination before specification

Check usable LED channel dimensions, heat management, fabric clearance, dif fusers, driver access and dimming compatibility. No wattage, driver count or cable sizing is inferred from renders.

SIDE WALLS: NO ADDITIONAL LED. RECESS: INSIDE LIGHT ONLY. COVE: RETAIN EXISTING GEOMETRY.

S supplied brief **P** source proposal **A** assumed / photo-informed **D** derived

All dimensions in mm. Verify on site. Print at 100%.

DT-01 · DESIGN DEVELOPMENT

Material and edge details

Concept sections explain intent only. Manufacturer profiles, substrate fixings, tolerances and installation clearances require installer coordination.

D1 / TENSIONED FABRIC BUILD-UP



Existing substrate. Cineca G2 gripper — 25 mm (acoustic) [P]. Cineca melamine acoustic foam — 25 mm (self-adhesive) behind the fabric [P]. Tensioned Lines FR #10 Bronze twill. Actual section and fire / acoustic documentation to be confirmed. 25 mm is the proposal system depth, not a verified installed clear dimension.

D2 / BLACK BORDER WITH INWARD LED




Solid matt-black face remains outside the light. Concealed channel aims inward across the fabric. Frame face sizes on the elevations are design assumptions [A]; LED of fsets are not the border face dimension. Confirm the frame section, finish and its junction with the ceiling line.

D3 / RECESS - INSIDE ONLY



Conceal the strip at the internal head of the recess; light falls onto the oak and equipment only. No exterior LED below the frame. Keep equipment access and ventilation. Recess height is approximate [A] - measure before the frame is made.

D4 / FABRIC SAMPLE

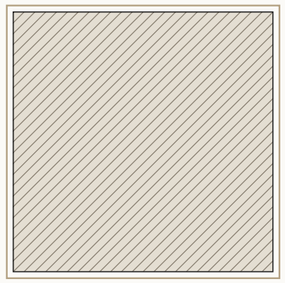

Lines FR - #10 Bronze twill. The physical sample governs; renders exaggerate the weave and do not reproduce the exact colour. Use the lower taupe sample in the supplied photograph (#10); the blue upper sample is #9.

S supplied brief **P** source proposal **A** assumed / photo-informed **D** derived

All dimensions in mm. Verify on site. Print at 100%.

QS-01 · DESIGN DEVELOPMENT

Quantities - show the working

This is the set-out behind the schedule. Gross area per surface, less the recorded openings, equals net fabric. Track = perimeter + around each opening + splits. Nothing here is an order quantity until the survey confirms the geometry.

SURFACE	SIZE	GROSS M2	OPENING DEDUCTION	NET M2	TRACK M (PERIMETER + OPENINGS + SPLITS)	PANELS	CUT-OUTS
W1 / Feature wall (TV)	5,000 x 2,360	11.800	Screen / TV 2.060 + Recess 0.610	9.130	14.72 + 10.17 = 24.89	1 x 5,000	5
W2 / Wall 2 (right)	4,650 x 2,360	10.970	Double door 3.360	7.610	14.02 + 7.40 = 21.42	1 x 4,650	0
W3 / Wall 3 (rear)	5,000 x 2,360	11.800	Window 2.850 + Pier face 1.760 + Pier face 1.760	5.430	14.72 + 18.80 = 33.52	1 x 5,000	0
P1 / Rear pillar (left of window)	800 x 2,200	1.760	None	1.760	6.00 + 0.00 = 6.00	1 x 800	0
P2 / Rear pillar (right of window)	800 x 2,200	1.760	None	1.760	6.00 + 0.00 = 6.00	1 x 800	1
W4 / Wall 4 (left / garden)	4,650 x 2,360	10.970	Glazed door 6.600	4.370	14.02 + 10.40 = 24.42	1 x 4,650	0
TOTAL / 6 surfaces		**49.060**	**19.000 total deduction**	**30.060**	**116.25 m**	**6 panels**	**6**

Fabric order

24.32 lm of 3000 mm roll = 72.94 m2 ordered for 30.06 m2 finished (railroad, 10% waste, 100 mm grip each edge). Supplier minimum 5 lm.

Track and infill

116.25 m of Cineca G2 gripper — 25 mm (acoustic) (116.25 perimeter + openings, 0.00 splits) in 2 m lengths. 31.57 m2 of Cineca melamine acoustic foam — 25 mm (self-adhesive) = 13 sheets. 776 fixings at 150 mm.

Excluded from this study

Returns, reveals, frame faces, LED channels, substrate preparation, tolerances, waste beyond the cutting allowance and actual roll yield. Concealed speaker positions are not three visible cut-outs.

Reconciliation - GPT R2 study (22 Oct)

GPT R2 study (22 Oct) carries 22.01 m2 net; this set-out gives 30.06 m2 and 116.25 m. A gap usually means a dif ferent opening assumption (GPT R2 leaves the rear flanks and the wall behind the curtain unfabriced and uses mid-range openings; this design covers all walls with openings at the low end of the photo ranges (high estimate, Bryn 22 Oct)) - reconcile on survey, not by averaging.

NO PROCUREMENT TOTAL ISSUED. FABRIC, TRACK, INFILL, LED ROUTES AND DEVICE CUT-OUTS REQUIRE ONE RECONCILED MEASURED SCHEDULE.

DR-01 · DESIGN DEVELOPMENT

Dimension register and survey priorities

No dimension in this issue is site-verified. The tags show where each value came from and how it may be used.

TAG	ITEM	VALUE / BASIS	PROVENANCE	REQUIRED CHECK
S	Room envelope	5,000 W x 4,650 D x 2,360 H	Client brief / survey app	Check substrate vs finished faces; confirm whether lining is included
S	W1 Screen / TV	1,890 x 1,090, left 1,555, sill 755	Client brief	85in Samsung (client) - no fabric behind; gripper round; thick matt-black frame all four sides; TV halo LED
A	W1 Recess	1,755 x 350, left 1,623, sill 250	Photo-informed assumption	Existing oak recess under the TV stays as just done - gripper round; black frame; LED inside under the top lip only. Width / height / bottom level approximate from photos.
A	W1 border face	80 face	Design-development assumption	Approve section, finish and channel detail
A	W2 Double door	1,600 x 2,100, left 2,500, sill 0	Photo-informed assumption	Internal glazed DOUBLE doors (client, R2). Photo range W 1600–1900 — low end used so the fabric estimate sits high; 2500 from the front corner; leaf split / handing TBC
A	W3 Window	1,500 x 1,900, left 1,750, sill 250	Photo-informed assumption	Two-pane window, low sill. Photo range W 1500–1800 / H 1750–2050 — low end used; roller blackout blind inside the reveal
P	W3 Pier face	800 x 2,200, left 950, sill 100	Source proposal	P1 footprint — the framed fabric face is its own surface
P	W3 Pier face	800 x 2,200, left 3,250, sill 100	Source proposal	P2 footprint — the framed fabric face is its own surface
P	P1 Rear pillar (left of window)	800 x 2,200	Proposal / photo	Measure face, base level and projection
A	P1 border face	80 face	Design-development assumption	Approve section, finish and channel detail
P	P2 Rear pillar (right of window)	800 x 2,200	Proposal / photo	Measure face, base level and projection
A	P2 border face	80 face	Design-development assumption	Approve section, finish and channel detail
A	W4 Glazed door	3,000 x 2,200, left 1,050, sill 0	Photo-informed assumption	Garden glazing, three tall bays. Photo range W 3000–4000 — low end used (high fabric estimate); 600 return at the front, 1050 at the rear. Fabric runs behind the full-wall curtain
A	Existing slatted cove	3,900 x 3,350 at 550 / 650, LED inset 50	Photo-informed	Survey opening, drop, lip and access
A	Window	1,500 x 1,900, sill 250	Photo-informed	Measure width, reveal and sill
P	Track / infill / roll	25 mm track, 25 mm infill, 3000 mm roll railroad	Source proposal / Library	Confirm system, roll orientation and approvals
D	Net fabric / track	30.06 m2 / 116.25 m	Arithmetic from the above	Only valid once inputs and set-out are confirmed

Survey first

Room clear widths / depth / height and diagonals; double-door outer frame and hinge handing; garden frame size, of fsets and threshold; rear window frame, sill, head and reveals; both pier fronts, returns and projections; TV casing and bracket; oak recess width / height / depth and floor datum; cove aperture, drop, lip and every service fitting; curtain track fixing zone and true stack depth; blind cassette clearance; driver and access positions.

DRAWINGS ARE COORDINATED STUDY GEOMETRY. DO NOT SCALE FROM AI VISUALISATIONS OR FABRICATE FROM ASSUMPTIONS.

RETAINED COMPARISON · DESIGN DEVELOPMENT

Further views

The remaining selected visualisations, kept for comparison.



OPTION 2 – FEATURE WALL WITH THE SIDE WALLS IN FABRIC (NO SIDE-WALL LE



OPTION 2 – REAR: SIDE WALLS IN FABRIC, PILLARS + COVE LED

Source record

Drawn from Stretched Fabric design 31 Prestbury Road (fabric_configs), the Library (Cineca pricelist, filed 2026-10-22) and the project record. Every value above can be traced to the app; change the design there and re-issue this pack rather than editing the drawings.

Proposal reference

SNR-SF-261022-N5TY

Commercials are carried on the formal Sonor quotation, which governs. This pack sets out the design and the geometry only.

INTERNAL · NOT FOR THE CLIENT

Cut list

One line per panel: finished size, the cut size with the tensioning allowance on every edge, and the roll length each panel consumes. Waste is added on the order quantity, not per panel.

ROOM	SURFACE	PANEL	FINISHED MM	CUT MM	ROLL LMRUN	
Cinema (Sitting Room)	Feature wall (TV)	P1	5000 × 2360	2560 × 5200	5.20	railroad
Cinema (Sitting Room)	Wall 2 (right)	P1	4650 × 2360	2560 × 4850	4.85	railroad
Cinema (Sitting Room)	Wall 3 (rear)	P1	5000 × 2360	2560 × 5200	5.20	railroad
Cinema (Sitting Room)	Rear pillar (left of win	P1	800 × 2200	2400 × 1000	1.00	railroad
Cinema (Sitting Room)	Rear pillar (right of w	P1	800 × 2200	2400 × 1000	1.00	railroad
Cinema (Sitting Room)	Wall 4 (left / garden)	P1	4650 × 2360	2560 × 4850	4.85	railroad

INTERNAL · NOT FOR THE CLIENT

Bill of materials

Order quantities with waste, fixings and the internal labour estimate. The WeQuote plan below is exactly what the push writes — prices resolve in WeQuote.

ITEM	QTY	NOTE
Fabric to order	24.3 lm	72.9 sqm · 30.1 sqm finished
Perimeter + opening track	116.3 m	
Split track	0.0 m	6 panels
Acoustic infill	31.6 sqm	13 boards
Track fixings	776 screws	150 mm pitch
Device cut-outs	6	
Labour estimate	43.9 h	walls / ceilings / panels / cut-outs / track — inte

INTERNAL COSTING · £11,655 SELL · £6,453 COST · MARGIN 44.6%

LINE	QTY	RATE	COST	SELL
Lines FR · #10 Bronze twill (rate TBC)	40.92 sqm	—	£0.00	£0.00
Cineca G2 gripper — 25 mm (acoustic) — perimet	72.00 m	£8.60	£619.20	£1,086.32
Cineca melamine acoustic foam — 25 mm (self-a	25.00 sqm	£27.72	£693.00	£1,215.79
Black-stained oak trim 100 × 20 mm	40.80 m	£13.50	£550.80	£966.32
Installation labour	27.60 h	£31.00	£855.60	£1,711.20
Builder — fit oak trim, front wall + rear panels (qu	1.00 each	£1,200.00	£1,200.00	£2,105.26
Cinema (Sitting Room) — front & rear — total · £	**18.08 sqm net**		**£3,918.60**	**£7,084.89**
Lines FR · #10 Bronze twill (rate TBC)	32.04 sqm	—	£0.00	£0.00
Cineca G2 gripper — 25 mm (acoustic) — perimet	46.00 m	£8.60	£395.60	£694.04
Cineca melamine acoustic foam — 25 mm (self-a	15.63 sqm	£27.72	£433.26	£760.11
Installation labour	16.30 h	£31.00	£505.30	£1,010.60
Builder — fit oak trim, side walls (approx, same	1.00 each	£1,200.00	£1,200.00	£2,105.26
Cinema (Sitting Room) — side walls (optional) — t	**11.98 sqm net**		**£2,534.16**	**£4,570.01**

Labour 43.9 h at £31.00 / £62.00 per hour · materials margin 43% · 2 line(s) without a Library price

WEQUOTE PLAN · NO QUOTE PAIRED

AREA	WEQUOTE PRODUCT	QTY	PRODUCT ID
GF · Cinema (Sitting Room)	Stretched Fabric - Lines FR (AT) — single line £	18.08 sqm	#3457569
GF · Cinema (Sitting Room)	Stretched Fabric - Lines FR (AT) — single line £	11.98 sqm	#3457569

THE DETAIL

- Fabric quantities are calculated from the surfaces shown, with a cutting allowance for tensioning into the track. Final quantities are confirmed on site survey.
- All fabrics are supplied from the chosen manufacturer's current range; physical samples are approved before any order is placed and colourways are subject to availability.
- Acoustically transparent fabrics are required wherever loudspeakers sit behind the finish; non-AT velvets are for feature walls and ceilings only.
- Device cut-outs are formed for every speaker, light, keypad and grille that passes through the fabric; positions follow the installed equipment.
- Substrates are assumed flat, dry and ready to receive track. Battening, boarding or making good is not included unless stated on the quotation.
- Commercials are carried on the formal Sonor quotation, which governs. This proposal sets out the design and the quantities only.

PROPOSAL REFERENCE

SNR-SF-261022-N5TY

Please quote this reference in any correspondence about this proposal.

22 October 2026

SONOR

Smart homes, beautifully done.

NEW PROJECTS & PROPOSALS

projects@sonor.co.uk

TELEPHONE

+44 7933 684 000

SERVICE & SUPPORT

service@sonor.co.uk

WEB

sonor.co.uk

Sonor Ltd · Chester, England · Trusted by homeowners across the North West & Wales

CEDIA MEMBER