SONOR



STRETCHED FABRIC PROPOSAL

31 Prestbury Road

Stretched fabric walls & ceilings · 1 room

PREPARED FOR	PROJECT	REFERENCE
Leena Bhavsar	**31 Prestbury Road**	**SNR-SF-261022-GSKE**

CEDIA MEMBER

STRETCHED FABRIC

31 Prestbury Road

Stretched fabric turns walls and ceilings into one seamless, tailored surface — the fabric is tensioned into a concealed perimeter track with acoustic infill behind, so speakers, lighting and the structure disappear into a single finish.

ROOMS
Cinema (Sitting Room)

FINISHED AREA
28.7 sqm across 5 walls

PANELS
5 fabric panels · 78.9 m of track

FABRIC
Lines FR · #10 Bronze twill

SYSTEM
Fabric Gripper — 25 mm acoustic

ACOUSTIC INFILL
30.2 sqm

DEVICE CUT-OUTS
6

IN THIS PROPOSAL

- Introduction
- Visualisations
- Cinema (Sitting Room)
- Fabric & colour
- The system
- Schedule
- The detail

THE FINISHED ROOM

Visualisations

Visualisations of the finished room, produced from the photographs and the design — the fabric, the seams and the light as they will be.



Option 1 — feature wall: Lines FR #10, black frame, perimeter + inset LED, TV halo, lit recess



Option 1 — rear: fabric pillars either side of the window, cove LED



Option 2 — feature wall with the side walls in fabric (no side-wall LED)



Option 2 — rear: side walls in fabric, pillars + cove LED

GF · ROOM

Cinema (Sitting Room)

Every surface is set out from the room geometry — wall lengths from the room plan, heights from the project record — so what is shown here is what will be installed.

FABRIC

Lines FR · acoustically transparent · #10 Bronze twill

SYSTEM

Fabric Gripper — 25 mm acoustic with Cineca melamine acoustic foam — 25 mm

SET-OUT


Railroaded · 5 panels · height 2360 mm

FINISHED AREA


28.7 sqm · 78.9 m track · 30.2 sqm infill · 6 cut-outs

ELEVATIONS · SEAMS = SPLIT TRACK · OPENINGS SET OUT FROM THE LEFT

Feature wall (TV) · 1 × 5000 mm · 2 openings · 5 cut-outs

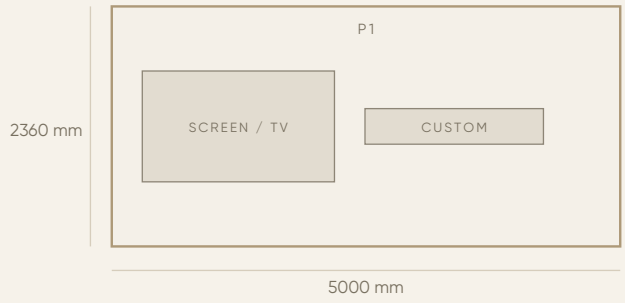

Wall 2 (right) · 1 × 4650 mm · 1 opening

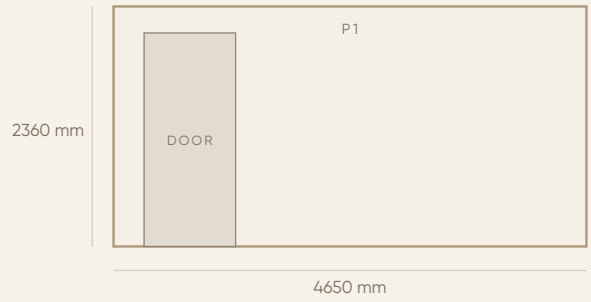


Rear pillar (left of window) · 1 × 800 mm




ELEVATIONS · SEAMS = SPLIT TRACK · OPENINGS SET OUT FROM THE LEFT

Rear pillar (right of window) · 1 × 800 mm · 1 cut-outs

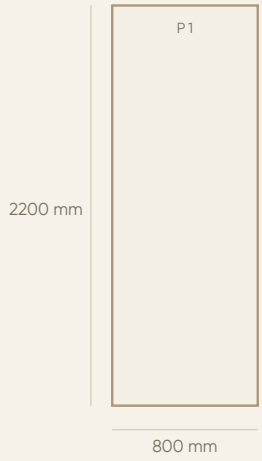

Wall 4 (left / garden) · 1 × 4650 mm · 1 opening

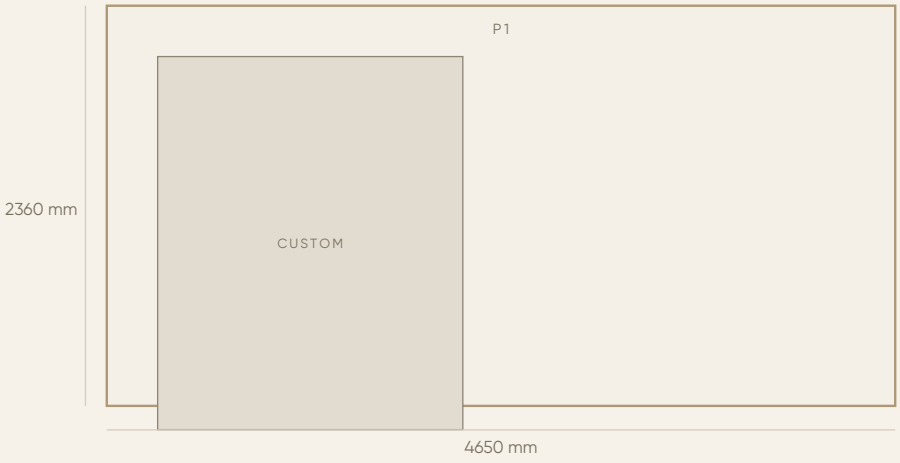

SIMULATION

Cinema (Sitting Room)

Photographs of the room as it is today, with the chosen fabric and lighting laid over the walls — the panel seams fall exactly where the set-out puts them, and the room keeps its own light.



Feature wall (TV) in Lines FR · #10 Bronze twill · LED: Ceiling cove

A simulation on the client's own photograph — colour, seams and light are indicative; physical samples govern the finish.

THE FINISH

Fabric & colour

Fabrics are chosen from the Sonor library — luxury velvets and FR weaves for feature walls, acoustically transparent cloths where loudspeakers sit behind the finish. Physical samples are approved before any order is placed.



CINEMA (SITTING ROOM)

Lines FR · AT

#10 Bronze twill · Cineca · 3 m roll

Herringbone / twill textured weave, FR · acou

Physical samples of every fabric and colourway are approved before any order is placed.

TRACK & INFILL

The system

The track depth sets what sits behind the fabric. A 12 mm track carries fabric alone; 25 mm and 50 mm acoustic tracks hold a mineral-wool infill that lets the surface absorb sound as well as look the part.

TRACK

Fabric Gripper — 25 mm acoustic · 25 mm — Acoustic track · 25 mm infill behind the fabric · AT fabrics

ACOUSTIC INFILL

Cineca melamine acoustic foam — 25 mm · 25 mm behind the fabric

SEAMS

Split track at every panel joint; fabric tensioned into the perimeter track with the edge concealed

USED IN

Cinema (Sitting Room)

HOW IT GOES TOGETHER

- Perimeter track is fixed to the substrate around every surface and around every opening.
- Acoustic infill (where specified) is fitted inside the track depth, flush with the track face.
- Fabric is cut with a tensioning allowance on every edge, stretched and tucked into the track — no visible fixings, no seams except at split tracks.
- Device cut-outs are formed on site at the installed positions of speakers, lights, keypads and grilles.

QUANTITIES

Schedule

Quantities carried on the quotation: fabric by the square metre per surface, track by the metre, infill by the square metre, and a cut-out for every device that passes through the finish.

ROOM	FABRIC	SQM	PANELS	TRACK M	INFILL SQM	CUT-OUTS
Cinema (Sitting Room)	Lines FR · #10 Bronze twill	28.7	5	78.9	30.2	6
Total		**28.7**	**5**	**78.9**	**30.2**	**6**

Cinema room: the Cinema Takeoff model carries 57.8 m of track and 1.2 sqm of fabric from the drawn walls — the drawn model governs for that room.

THE DETAIL

- Fabric quantities are calculated from the surfaces shown, with a cutting allowance for tensioning into the track. Final quantities are confirmed on site survey.
- All fabrics are supplied from the chosen manufacturer's current range; physical samples are approved before any order is placed and colourways are subject to availability.
- Acoustically transparent fabrics are required wherever loudspeakers sit behind the finish; non-AT velvets are for feature walls and ceilings only.
- Device cut-outs are formed for every speaker, light, keypad and grille that passes through the fabric; positions follow the installed equipment.
- Substrates are assumed flat, dry and ready to receive track. Battening, boarding or making good is not included unless stated on the quotation.
- Commercials are carried on the formal Sonor quotation, which governs. This proposal sets out the design and the quantities only.

PROPOSAL REFERENCE

SNR-SF-261022-GSKE

Please quote this reference in any correspondence about this proposal.

22 October 2026